


# Industrial 4G Router

YF360

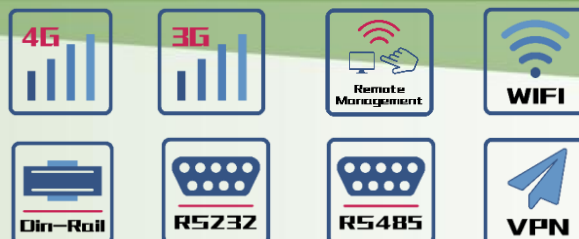

## Introduction

YF360 Industrial Router is an IoT wireless communication router. It is using public cellular network GPRS/CDMA/WCDMA/EVDO/LTE to provide long distance, wireless and large data transmission function for users. The product uses the high-performance industrial-grade 32-bit CPU and wireless module, with the embedded real-time operating system as the software support platform. It provides RS232/RS485, Ethernet port and WIFI that can be connected to the serial device, Ethernet devices and WIFI devices at the same time, achieve data pass-through function.



Industrial-grade Design

- ▶ High-performance industrial-grade CPU
- ▶ High-performance industrial-grade wireless communication module
- ▶ Support low-consumption mode, scheduled power-on/power-off mode (Optional)
- ▶ Metal casing, IP30 protection level, suitable for most industrial control applications.
- ▶ Wide range power input (DC 5~36V)



Stability & Reliability

- ▶ SIM/UIM card slot with built-in 15KV ESD
- ▶ Ethernet interface with built-in 15KV ESD
- ▶ RS232/RS485 with built-in 15KV ESD
- ▶ Multiple protection mechanism to ensure system stability, always keeping online
- ▶ Auto recovery mechanism, including online detect and auto redial
- ▶ Support hardware and software WDT



Standard & Convenience

- ▶ Standard RS232 (or RS485/RS422), ethernet and WIFI interface, can be connected to the serial device, ethernet devices and WIFI devices
- ▶ Provide standard wired WAN port (support standard PPPOE protocol), Can be connected to ADSL devices directly
- ▶ Intelligent data terminal, automatically enter transmission status after power-on
- ▶ Powerful central management software for easy device management (optional)
- ▶ Easy to use and flexible, has multiple working modes
- ▶ Convenient system configuration and maintenance interface (including local and remote WEB or CLI access)
- ▶ DIN-Rail mounting, wall mounting or desktop

# Industrial 4G Router YF360 Series



High Performance

- ▶ Multiple WAN connection methods, include Static IP/DHCP/PPPOE/DHCP-4G
- ▶ Support APN/VPDN
- ▶ Support NTP, RTC embedded.
- ▶ Support multiple DDNS provider service
- ▶ Support multiple online trigger ways, including SMS, ring and data. Support link disconnection when timeout
- ▶ Support remote management, SYSLOG, SNMP, TELNET, SSHD, HTTPS, etc.
- ▶ Support upgrade software from the local and remote maintenance
- ▶ Support various network protocols including TCP/IP, UDP, FTP (optional), HTTP, etc.
- ▶ Support SPI firewall, access control, URL filtering, etc.
- ▶ WIFI 802.11b/g/n. Support AP, client, Adhoc, Repeater, Repeater Bridge mode.
- ▶ Support VPN Client (PPTP/L2TP/OPENVPN/IPSEC/GRE)
- ▶ Support VPN Server (PPTP/L2TP/OPENVPN/IPSEC/GRE)
- ▶ Support DHCP server and client, firewall, NAT, DMZ host , URL block, QOS, traffic, statistics, real time link speed statistics etc.
- ▶ Schedule Reboot, Schedule Online and Offline, etc.
- ▶ Support GPS function (Optional)

## Product Specification

Cellular Specification	
Items	Contents
<b>Standard and Band</b>	LTE FDD: B1/B3/B5/B7/B8/B20/B28 B1/B2/B3/B4/B5/B7/B8/B28 (Optional), B2/B4/B5/B12/B13/B17/B66/B71 (Optional) LTE TDD: B38/B39/B40/B41 HSPA+/HSUPA/HSDPA/WCDMA/UMTS 2100/1900/900/850MHz EV-DO: BC0 CDMA 1x: BC0 EDGE/GPRS/GSM 850/900/1800/1900MHz
<b>Bandwidth</b>	FDD-LTE: Downstream rate 150Mbps, uplink rate 50Mbps TD-LTE: Downstream rate 130Mbps, uplink rate 35Mbps DC-HSPA+: Downstream rate 42Mbps, uplink rate 5.76 Mbps HSPA+: Downstream rate 21Mbps, uplink rate 5.76 Mbps UMTS: 384Kbps
<b>Transmit Power</b>	< 23dBm
<b>Sensitivity</b>	< -93.3dBm

# Industrial 4G Router YF360 Series



## WIFI Specification

Items	Contents
Standard and Band	IEEE802.11b/g/n
Bandwidth	IEEE802.11b/g: 54Mbps (Maximum) IEEE802.11n: 144Mbps (Maximum)
Security	Support WEP, WPA, WPA2 encrypt methods, optional WPS function
Transmit Power	15 ± 2dBm
Sensitivity	< -72dBm @ 54Mbps

## Hardware System

Items	Contents
CPU	Industrial-grade CPU
Flash	16MB(Extendable to 64MB)
DDR2	128MB

## Interfaces

Items	Contents
WAN Interface	1 x 10/100M RJ45 ethernet port, adaptive MDI/MDIX, built-in 15KV ESD
LAN Interface	4 x 10/100M RJ45 ethernet port, adaptive MDI/MDIX, built-in 15KV ESD
Serial	1 x RS232/RS485 serial interface with built-in 15KV ESD Data bits:5, 6, 7, 8 bits Stop bits:1, 1.5 (optional), 2 bits Error detection: none, even parity, odd parity, SPACE (optional) and MARK (optional) Serial Port Rate: 2400~115200bits/s
LED Indicators	"Power", "System", "Online", "SIM", "LAN", "WAN", "WIFI", "Signal Strength"
Antenna Interface	Cellular: 2 * Standard SMA female antenna interface, characteristic impedance: 50 Ω WIFI: Standard SMA male antenna interface, characteristic impedance: 50 Ω
SIM/UIM Slot	Standard SIM card slot, support 1.8V/3V SIM/UIM card, built-in 15KV ESD
Power Interface	Standard 3-PIN power jack, reverse-voltage and over-voltage protection
Reset Button	Can reset router's configuration to default factory setting by this button

# Industrial 4G Router YF360 Series



Note: There may be differences between models of accessories and interfaces, actual products shall prevail.

Power	
<b>Items</b>	<b>Contents</b>
<b>Input Voltage</b>	DC 12V/1.5A
<b>Accepted Range</b>	DC 5~36V
Power Consumption	
<b>Work Mode</b>	<b>Consumption</b>
<b>Standby</b>	280 ~ 330mA@12VDC
<b>Communicating</b>	325 ~ 562mA@12VDC
<b>Schedule Shutdown</b>	2.57~4.2mA@12DVC
Physical Properties	
<b>Items</b>	<b>Contents</b>
<b>Casing</b>	Metal casing, IP30 protection level, suitable for most industrial control applications.
<b>Dimensions</b>	206x135x28 mm (excluding antennas and mountings)
<b>Weight</b>	790g
Others	
<b>Items</b>	<b>Contents</b>
<b>Operating Temperature</b>	-35~+75℃
<b>Storage Temperature</b>	-40~+85℃
<b>Relative Humidity</b>	95% (non-condensing)


# Industrial 4G Router YF360 Series



## GPS(Optional)

Items	Contents
<b>GPS Module</b>	Industrial GPS module (Optional Beidou module)
<b>Receiver Type</b>	50 channels GPSL1 (1575.42MHz) C/A code Support WAAS and EGNOS, MSAS, GAGAN
<b>Maximum Update Rate</b>	4Hz
<b>Positioning Accuracy</b>	Positioning: 2.5m CPE SBAS: 2.0m CPE
<b>Sensitivity</b>	Tracking: -160 dBm Re-capture: -160 dBm Cold start: -146 dBm

## Topology

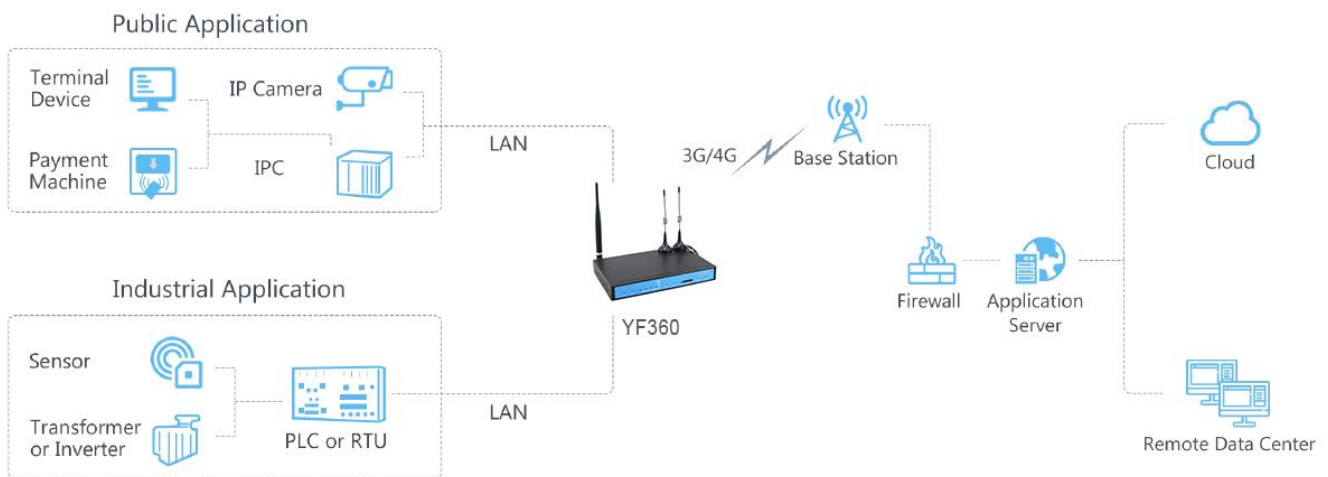

# Industrial 4G Router YF360 Series



## Dimension



## Order Information

Models	Description	WAN	LAN	Cellular Antennas	WIFI Antenna	SIM/UIM	GPS
YF360-L	Industrial LTE WIFI Router	1	4	2	1	1	Optional